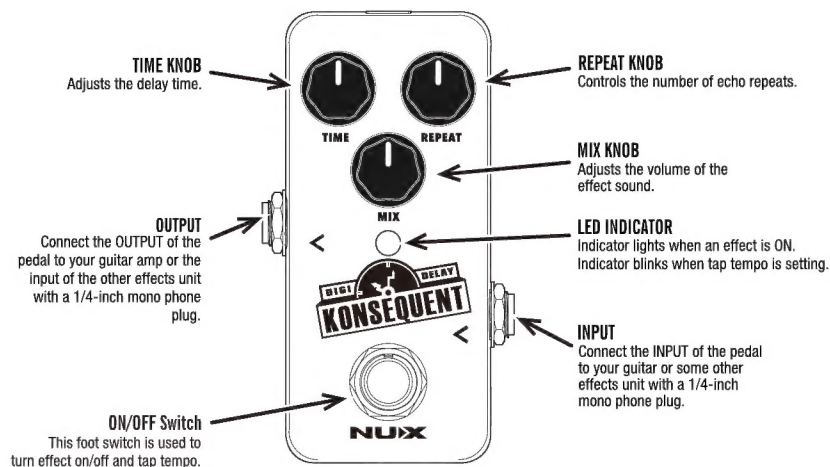# NUX
MINI PEDAL

MICRO USB PORT
Connect to PC/MAC using a micro USB cable for upgrade of firmware.

Note: You can't connect a USB power supply to the USB port. A conventional power supply is required for operating this product.

POWER IN
9V DC with center negative, and capable of supplying 300mA or more.

TIME KNOB
Adjusts the delay time.

REPEAT KNOB
Controls the number of echo repeats.

MIX KNOB
Adjusts the volume of the effect sound.

OUTPUT
Connect the OUTPUT of the pedal to your guitar amp or the input of the other effects unit with a 1/4-inch mono phone plug.

LED INDICATOR
Indicator lights when an effect is ON. Indicator blinks when tap tempo is setting.

INPUT
Connect the INPUT of the pedal to your guitar or some other effects unit with a 1/4-inch mono phone plug.

ON/OFF Switch
This foot switch is used to turn effect on/off and tap tempo.

INTRODUCTION

Konsequent Digi Delay is more than just a great digital delay, it create a sparkle modulated delay sound with the warm compression of a multi-head tape echo.

Features
- A clean, high-resolution delay with multi tap and saturation tone
- 800ms delay range
- Trails (buffer-bypass) or true-bypass
- Tap tempo function

Performance
- Ultra low noise, high performance 96bkHz/24bit A/D and D/A converters
- 100dB typical Dynamic Range
- Zero latency analog routing for superb audio performance
- 32-bit floating point processing with high performance DSP core
- Micro USB port for upgrade firmware

More
- Luminous knobs for checking on the dark stage
- Strong and lightweight aluminum die-cast chassis
- 9V center negative DC supply, 90mA current draw
- Dimensions: 94(L) X 51(W) X 53(H) mm / 3.7(L)X2.0(W)X2.08(H) inches
- Weight: 174 g / 6 oz

Tap Tempo

Tapping the foot switch in time with the song's tempo whenever the pedal is bypass or active status. Turning the TIME knob resets the delay time to that indicated by the knob's position.

Setting the Bypass Mode

Connect a 9V power supply to the DC input socket:

- The LED will blink in green briefly to indicating current mode is buffered bypass.
- The LED will blink in red briefly to indicating current mode is ture bypass.

To change the bypass mode, unplug the pedal first, and press and hold the footswitch while re-applying power to the pedal. the pedal will cycle to the next mode, and the color of indicator indicates the current mode.

*Specification may change without notice.

www.nuxefx.com   Made in China

MODEL: NDD-2
Digi Delay